

# TotalSense™ Series Indoor Environmental and Air Quality Sensor Matrix



Industry's first IAQ sensor with PIR motion detection  
Eight environmental sensors: PIR, PMx, VOC, CO<sub>2</sub>, RH, T, ambient light, barometric pressure  
BACnet/Modbus and/or analog outputs with set-point relay

## DESCRIPTION

The TotalSense™ Series provides more data for more advanced ventilation control while drastically reducing installation cost and time on a project. It includes a comprehensive selection of IAQ sensing with carbon dioxide (CO<sub>2</sub>), relative humidity (RH), and temperature plus options for occupancy detection (PIR), total volatile organic compounds + Formaldehyde (TVOC/CH<sub>2</sub>O), particulate matter (PM), Carbon Monoxide (CO), Ozone (O<sub>3</sub>), barometric pressure, and ambient light. More than an IAQ sensor, it's the first fully configurable Indoor Environmental Quality (IEQ) sensor matrix.

Motion detection (PIR) can initiate ventilation upon occupancy, providing air exchanges the instant people are present (in addition to monitored elevated CO<sub>2</sub> levels). This technology provides a much faster trigger for ventilation allowing for cleaner and safer indoor spaces while still saving energy.

## APPLICATIONS

- Verify effectiveness of IAQ strategies in post covid environment
- Energy management/building control
- Facilitates compliance with ASHRAE 62.1 standard for air quality




Made in USA



Contributes toward satisfying Feature A08 and T06 under the WELL Building Standard®



## TEN TECHNOLOGIES FOR OPTIMUM INDOOR AIR QUALITY

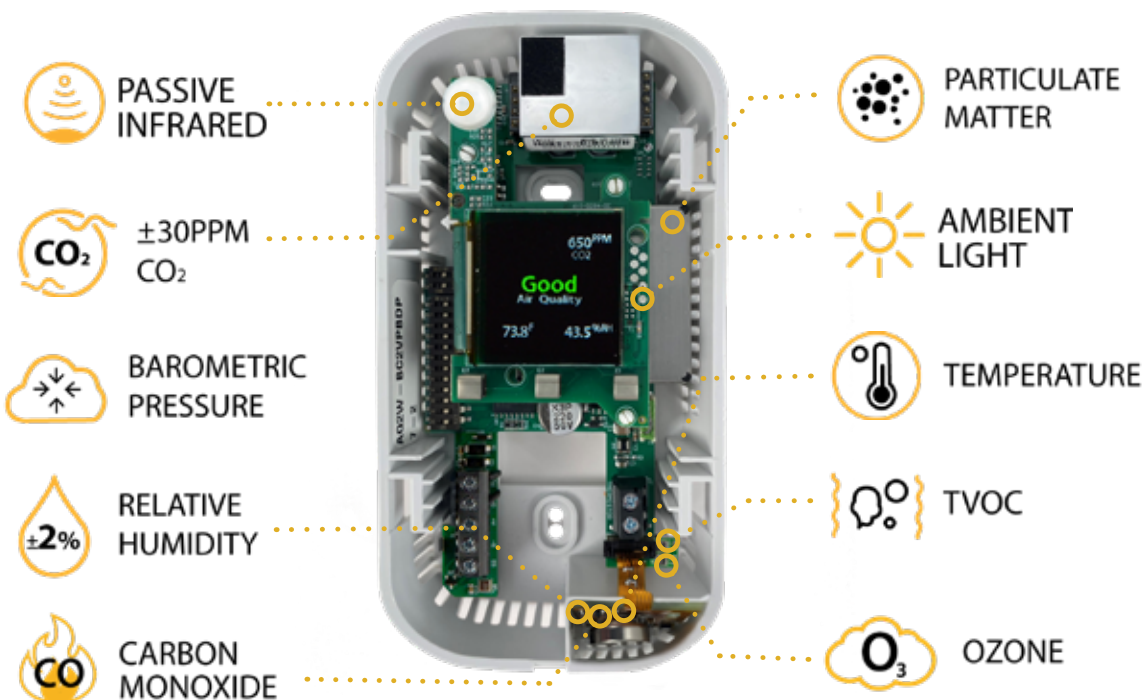


## OPTIONS



### Versatile Display or AQ ring

- Fully customizable
- Good/Fair/Poor settings and color icons available

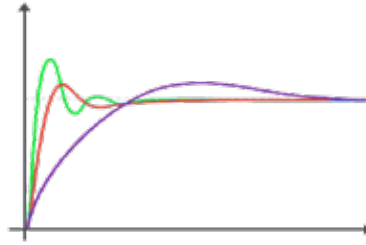

### PID Control for CO2 or Temp

- Use PID feature on any analog output for local control of dampers or heat valves
- New models available with BACnet/Modbus PLUS analog



### Configuration App - Senva Sync

- Fast installation. Edit display, analog, or PID settings and load to one or many devices at a time - no device power needed!



### PIR Motion Sensing

- Trigger ventilation or lighting based on occupant movement
- Automatic PIR wake-up for OLED display - highly visible readings whenever a room is occupied



### Built for building automation.



### Analog outputs or BACnet MSTP / Modbus RTU

- Comprehensive data
- Integrated set-point relay (programmable)



### TVOC and PM Sensors

- Detect unhealthy airborne particulates down to 0.3  $\mu\text{m}$  or VOC's for a comprehensive understanding of indoor air quality.

## ORDERING

Package	AQ2	Output Type	CO2	Relative Humidity	VOC	Advanced Sensors*	Temperature Output**	Display	Accessories***
W = Surface	[ ] - [ ]	A = Analog B = BACnet/Modbus D = Dual Analog + BACnet/Modbus	A = None C = CO2 D = Dual Channel CO2	A = None 2 = 2% RH	A = None V = VOC	A = None P = Particulate Matter (PM) O = Ozone (O <sub>3</sub> ) Q = PM + O <sub>3</sub>	A = None B = Transmitter C = 100Pt RTD D = 1000Pt RTD E = 10K Type 2 F = 10K Type 3 G = 10k w/11k H = 3k I = 2k2 J = 1k8 K = 20k	X = None D = OLED Display S = OLED display with solid cover R = Air Quality Ring	Blank = No Accessories C = 1k $\Omega$ SP Slider F = 10k $\Omega$ SP Slider E = 910 $\Omega$ offset resistor S = Slider override PB O = Thermistor Override PB U = User PB T = 20k $\Omega$ offset resistor
		<b>NEW</b>				<b>NEW</b>			<b>NEW</b> <b>CO Sensor****</b> Q = CO <b>PIR Sensor</b> P = PIR Sensing

\*PM Available on AQ2W-B or AQ2W-D versions only. Advanced Sensor options "O" and "Q" only available on AQ2W-BC2VOB... models.

\*\*Choose transmitter option for temperature display or BACnet/Modbus temp readings. Thermistor versions will be equipped with an isolated resistive thermistor circuit, so cannot be read on the display or over BACnet/Modbus.

\*\*\*Slider and pushbutton options not available with PM sensor. Call for additional slider, offset, and override options.

\*\*\*\*CO sensor only available with display option for calibration purposes.

## SPECIFICATIONS



Power Supply	Non-Display	16-30VDC/24VAC <sup>(1)</sup> , 3.5W nominal, 4W max.	
	Display or LED Ring	24-30VDC/24VAC <sup>(1)</sup> , 4.3W nominal, 5W max.	
Interface	OLED (optional)	1.5" Organic LED Display, 128x128, color	
	Air Quality Ring	Color changing (red/yellow/green) LED Air Quality Ring	
Analog Outputs (Analog or Dual version only)	Quantity	Up to 3 outputs	
	Source	CO <sub>2</sub> , RH%, Temp, Temp slider, TVOC (selectable)	
	Scale	0-5V, 0-10V, 4-20mA (switch selectable, programmable per output)	
Protocol Output (Comms or Dual version only)	Protocol	BACnet MS/TP or Modbus RTU	
	Connection	3-wire RS-485, with isolated ground	
	Data Rate	9600, 19200, 38400, 57600, 76800, 115200 (switch selectable)	
	Address Range	0-127	
Relay (Standard except for PM models)	Type	Solid-state output, 1A @ 30VAC/DC, N.O.	
	Polarity	NO/NC (selectable)	
	Source	CO <sub>2</sub> setpoint, RH setpoint, Temp setpoint, TVOC setpoint, PIR motion detection, Air Quality, off (selectable)	
CO <sub>2</sub> (Optional)	Type	Non-dispersive Infrared (NDIR)	
	Accuracy	±(30ppm + 3% of reading) (400-2,000ppm), -10-50°C, 0-85%RH ±(50ppm + 5% of reading) (2,000-5,000ppm), -10-50°C, 0-85%RH >5,000ppm consult factory	
	Resolution	1 ppm	
	Range	0-2,000 PPM (Default) (Programmable up to 10,000ppm)	
	Response time	90 seconds to 90% reading	
	Sample rate	1s	
Temp and Pressure Compensation	Yes, barometric pressure readable over comms		
Relative Humidity (Optional)	Type	Digital CMOS	
	Accuracy <sup>(2)</sup>	2% models, +/-2% over 0 to 80%RH range	
	Resolution	0.05%RH	
	Response time <sup>(3)</sup>	30s	
	Sample rate	3s	
	Operating range	0 to 100%RH (non-condensing)	
Operating conditions <sup>(4)</sup>	-4 to 140°F (-20 to 60° C) @ RH>90%; -4 to 176°F @ RH=50%		
Temperature Transmitter (Optional)		<u>With RH option</u>	<u>Without RH option</u>
	Type	Silicon Band-gap	NTC Thermistor
	Nominal Accuracy	±0.3° C (operating range)	±0.5° C (operating range)
	Maximum Accuracy <sup>(2)</sup>	±0.5° C (at 25° C), ±1.0° C	±1.0° C (at 25° C), ±2.0° C
	Resolution	0.1° C	0.05° C
	Response time	30s	30s
Sample rate	3s	100 milliseconds	
TVOC (Optional)	Type	MOS	
	Gas	Total VOC	
	Formaldehyde CH <sub>2</sub> O Sensitivity	Responsive to Formaldehyde concentrations 50-1000 ppb	
	Range	0-32,000 µg/m <sup>3</sup> (Display may be programmed to show PPB)	
	Response Time	<10s	
Output	0-2,000 µg/m <sup>3</sup> (default) programmable up to 32,000 µg/m <sup>3</sup>		

1. One side of transformer, secondary is connected to signal common. Dedicated transformer is recommended.
2. Models with PM sensor included achieve ±5% accuracy over 0 to 80%RH range and an additional temperature shift of up to +0.5°C
3. Time for reaching 63% of reading at 25° C and 1 m/s airflow
4. Long term exposures to conditions outside normal range at high humidity may temporarily offset the RH reading (+3%RH after 60 hours.)

SPECIFICATIONS

PMx (Optional) CLASS 1 LASER PRODUCT	Type	Optical
	Size range $\mu\text{m}/\text{m}^3$	1.0, 2.5, 4.0, 10.0 (each range is $0.3 \mu\text{m-x.x} \mu\text{m}$ )
	Size Range $\#/\text{cm}^3$	0.5, 1.0, 2.5, 4.0, 10.0 (each range is $0.3 \mu\text{m-x.x} \mu\text{m}$ ) (comms readings only)
	Scale	0-1,000 $\mu\text{g}/\text{m}^3$
	Lower detection limit	0.3 $\mu\text{m}$
	Precision	$\pm 10 \mu\text{g}/\text{m}^3$ (0-100 $\mu\text{g}/\text{m}^3$ ); $\pm 10\%$ (100-1,000 $\mu\text{g}/\text{m}^3$ )
	Long-Term Drift	$\pm 1.25 \mu\text{g}/\text{m}^3$ / year
Carbon Monoxide <span style="color: gold;">NEW</span>	Type	Electrochemical
	Detection Range	0-200 ppm
	Accuracy	$\pm 5\%$ Full scale @20°C
	Resolution	1 ppm
	Response Time	<30 seconds to 90%
	Sensor Life	5 years
	Certifications	UL2034 recognized component
Ozone <span style="color: gold;">NEW</span>	Type	MOS
	Gas	Ozone, cross sensitivity to NO <sub>2</sub>
	Ozone Detection Range	20-500 ppb
PIR (Optional)	Type	Passive Infrared
	Axis X field of view	140°, 15 ft (4.5m)
	Axis Y field of view	76°, 15 ft (4.5m)
Ambient Light	Type	Phototransistor
	Scale	0-100 fc (lm/ft <sup>2</sup> ), readable over comms
Operating Environment	Temperature	32 to 122°F (0 to 50°C)
	Humidity	0-95% non-condensing
Enclosure	Material	ABS Plastic
	Dimensions	5.67" h x 3.00" w x 1.07" d (With concealing ring: 6.35" h x 3.69" w x 1.25" d)
	Agency	CE, RoHS
Compliance	Accreditations	RESET Air Accredited Monitor
	Standards	Facilitates compliance with ASHRAE 62.1 standard for air quality
		Contributes toward satisfying Feature A08 and T06 under the WELL Building Standard®

DIMENSIONS

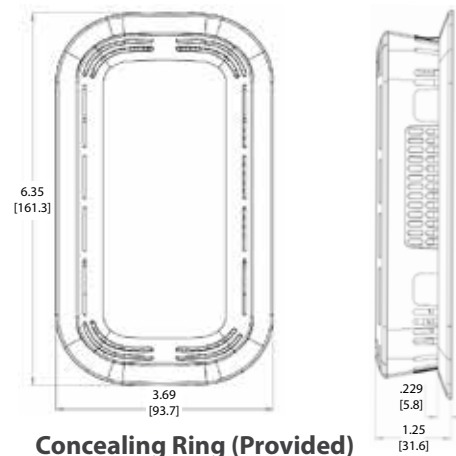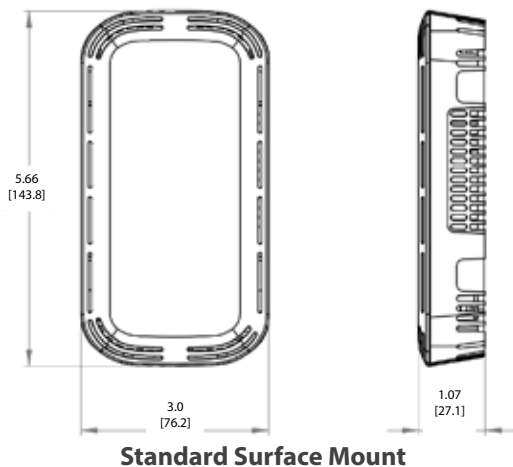

**Warning:** Refer to installation instructions that accompany product and heed all safety instructions.

- Conceal oversized drywall cutouts or European junction boxes